



Riedel AIO




4-5 RX (in)
7-8 TX (out)

BTR800

3-4 TX (out)
2-5 RX (in)




Adam Port



3-4 RX (in)
2-5 TX (out)

ClearCom CCI



4-5 RX (in)
3-6 TX (out)



Original Clear-Com IMF 15 pin 4-wire connection


IMF-1 Interface Chassis Matrix
Connection DB-15F

pin #	Use
1	NC
1	NC
2	+ Audio Talk (output)
3	+ Audio Listen (input)
4	Call Send Return
5	Ground
6	Interface Sel-0
7	Ground
8	Interface Sel-3
9	NC
10	- Audio Talk (output)
11	- Audio Listen (input)
12	GND
13	Call Send
14	Interface Sel-1
15	Interface Sel-2

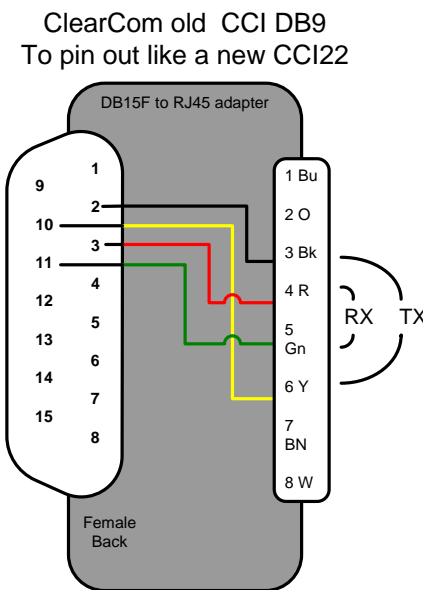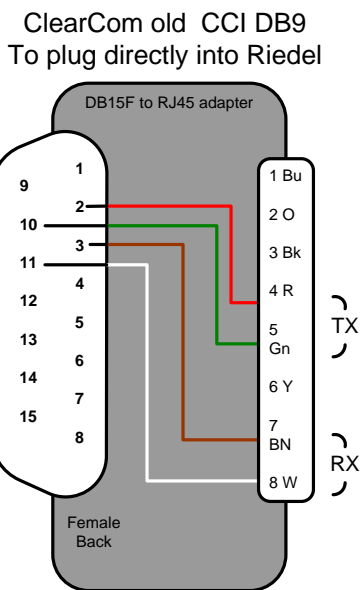



HME DX200

3-6 RX (in)
4-5 TX (out)



HME 850

3-6 RX (in)
4-5 TX (out)

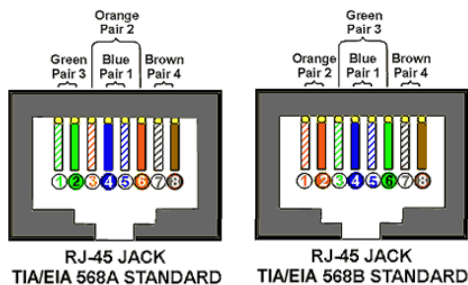

Revisions	

320 Seventh Avenue, #264
Brooklyn, NY 11215
917-750-1134

Intercom Adapters

4-wire port wiring

Designer: Pete Erskine

SCALE None

Drawn by: Pete Erskine

DATE: Feb 26, 2007

Drawing Number

3